STUDIO

FLB

- web elevagegroup.com.au
- linkedin Elevage Lighting Group
- instagram/ facebook elevagelighting



SURGE
by Elevage Lighting Group

SITE

Vibrant RGBW floodlight for artistic landscapes, pubs and wall features with dynamic lighting effects.



[figure 1]

KEY FEATURES

- Aluminium die cast housing
- Standard beam angle: 120°
- Voltage AC200-240V
- 90-120 Lumens per watt
- SMD2835 / 6064
- 50/60Hz
- Controlled by App (Bluetooth)
- IP66 Rated
- Temperature: -25°C to 50°C
- 50,000 Hours Lamp Life

SURGE
by Elevage Lighting Group

PRODUCT CONFIGURATION GUIDE

The Studio FLB is available in the below structure and measurement.

STRUCTURE		MEASUREMENTS		
Power (Wattage)	CCT (K)	Length (mm)	Width (mm)	Height (mm)
100W	RGBW	309	61	261

ORDERING CODE STRUCTURE

Based on the product configuration guide above, the product code is

SURGE-STUDIO-FLB-100W

5 year warranty

SURGE by Elevage Lighting Group

LIGHTING APP USER GUIDE

Download and Installation

Download the “fi light” App

- Scan the QR code using your phone’s camera to open the app download page.
- Alternatively, open the Apple App Store or Google Play Store, search for “fi light”, and select Install or Get.
- Once installed, open the app and allow access to Bluetooth and nearby devices when requested. Android devices may also require location permission to discover nearby lighting products.
- Ensure the light fitting is powered on and Bluetooth is enabled on your phone before opening the app.

Scan to install

Search for “fi light” to download


GET IT ON Google Play

Download on the App Store

SURGE by Elevage Lighting Group

LIGHTING APP USER GUIDE

Device and Lighting Controls

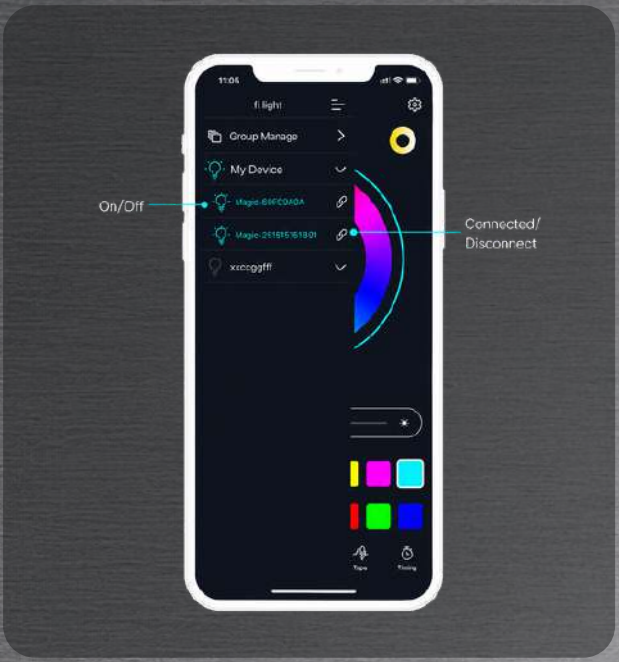

1. Device Management

Open My Device to view nearby lights. Tap the connection icon to connect or disconnect a light, or use Group Manage to control multiple lights together.




2. RGB Colour Control

Use the RGB colour wheel to select a colour. Adjust the brightness slider or choose a preset colour for quick control.



3. CCT Control

Select the CCT disk to adjust between warm and cool white. Choose a preset CCT and adjust the brightness as required.

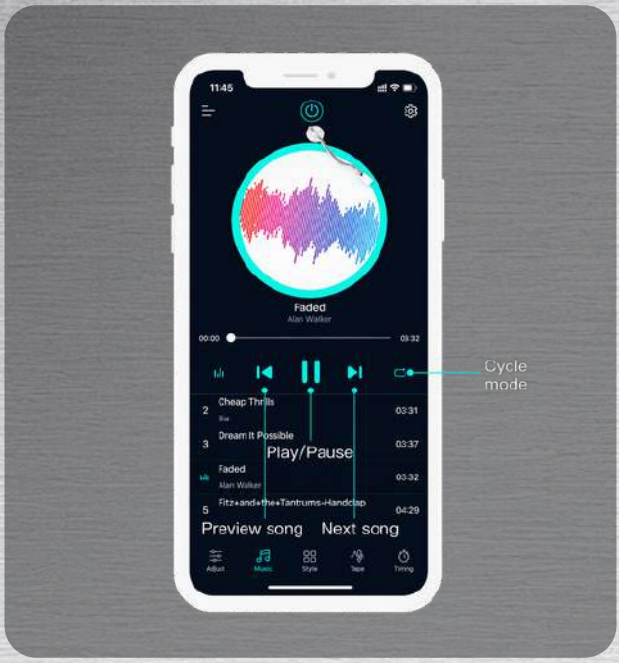


4. Music Mode

Select Music, choose a song and press Play. The lighting will automatically respond to the music's rhythm.

SURGE
by Elevage Lighting Group


LIGHTING APP USER GUIDE

Effects, Sound, Settings and Timer

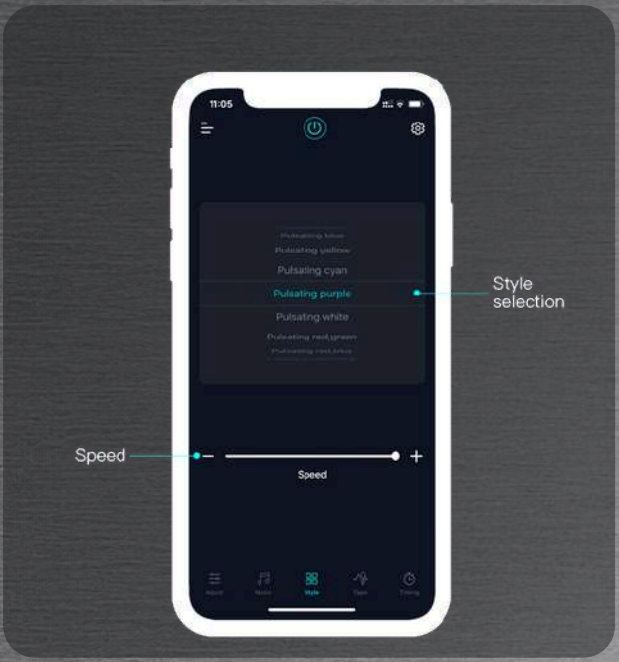


5. Style Mode

Select Style, choose a lighting effect and use the slider to adjust its speed.

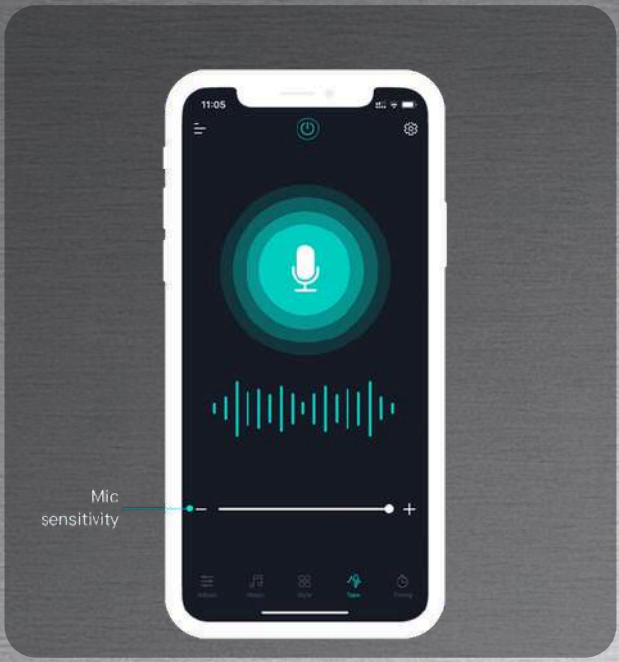


6. Sound-Reactive Mode

Select Tape to make the lighting react to surrounding sounds. Adjust the microphone sensitivity as required.

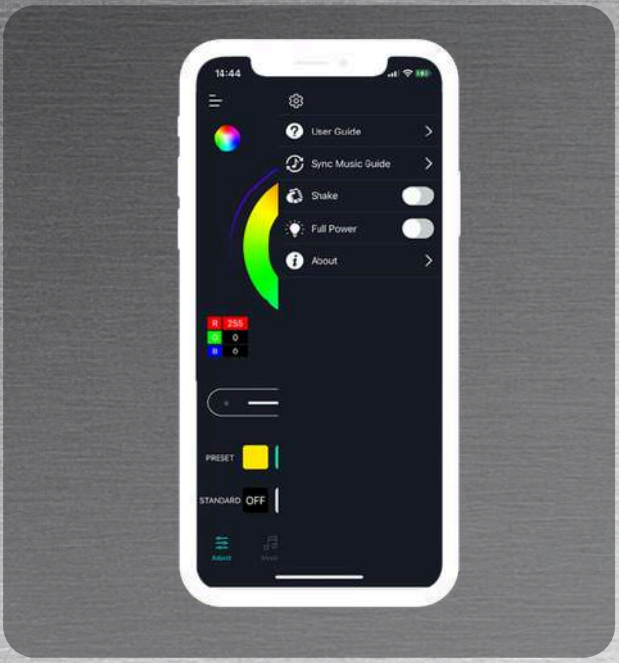

7. App Settings

Open Settings to access the User Guide, Music Sync Guide, Shake mode, Full Power mode and app information.

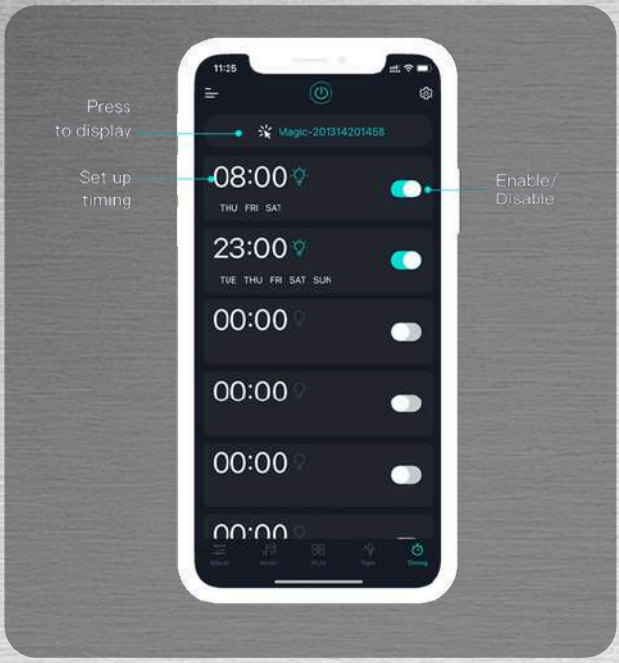

8. Timer and Scheduling

Select Timing to schedule the light to switch on or off. Choose the device, time and operating days, then enable the schedule

SURGE
by Elevage Lighting Group

SURGE

by Elevage Lighting Group