

## Electrical Parameters

Power: 40W  
Input Voltage: 220-240V 50/60Hz  
Power Factor: 0.95, Flicker Free  
IP Rating: Standard IP20 (IP65 available on request)  
Dimmable: Optional  
Certificates: CE, ROHS, SAA  
Standards: EN 55015:2006+A1:2007+A2:2009 /  
EN 61000-3-2:2006+A1:2009+A2:2009 /  
EN 61000-3-3:2008/EN 61547:2009



## Photometric Parameter

CRI:  $\geq 80$  Ra  
Beam Angle:  $120^\circ$   
Colour Temperatures: 3000k to 6500k



**High lumen is achieved by using  
HONGLI TRONIC 2835 LED**



**HONGLITRONIC**




## Lifetime

Lifetime (F50): 50,000 hrs  
Lumen maintenance (L70): 50,000hrs  
Warranty : 3 years  
Min/Max operating Temp:  $-20^\circ\text{C} / +45^\circ\text{C}$

## General Information

Body Material: Aluminium frame & plate  
Product Colour : White Trim (Standard) Other trim colour options on request!

## Product Dimensions

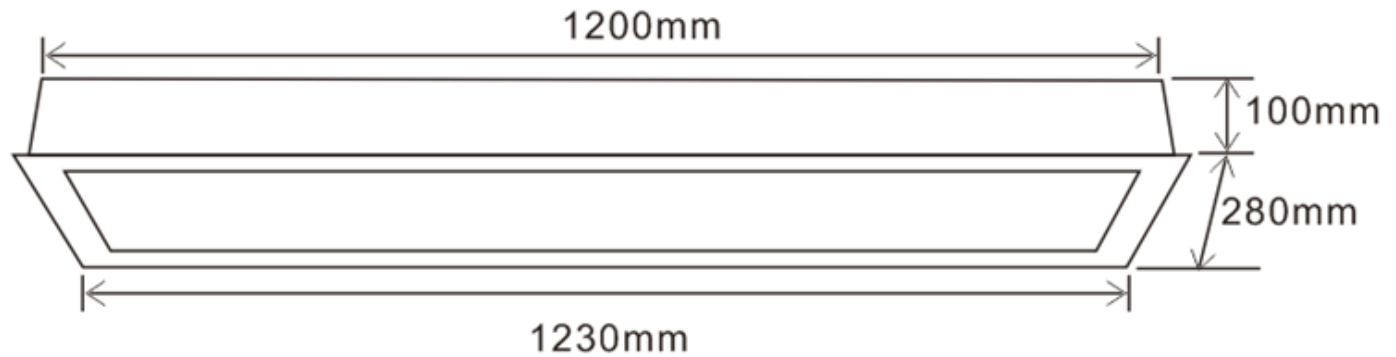

## Order Codes

Order Code	Alpha Code	Watt	Colour Temp.	Lumen Output	Product Weight
CR-40W-3K-EL	CLEANPANEL40W3K1200X300	40W	3000K	4000 lm	7.53kg
CR-40W-4K-EL	CLEANPANEL40W4K1200X300		4000K	4000 lm	
CR-40W-5K-EL	CLEANPANEL40W5K1200X300		5000K	4000 lm	
CR-40W-6K-EL	CLEANPANEL40W6K1200X300		6500K	4000 lm	

