


Slimline LED flood lights are suitable for both outdoor and indoor commercial applications such as parking areas, billboards and common areas.

Product Features

- Aluminium die cast housing
- Tempered glass face
- IK08 Impact rating
- Long operating life and performance
- 120° Beam Angle
- IP66 Waterproof housing
- Full range bracket

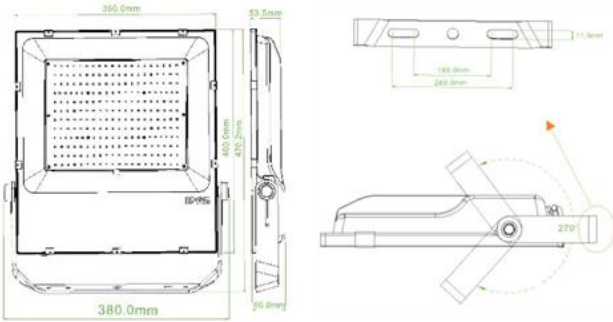

SPECIFICATION	EL-50W-FLOOD	EL-100W-FLOOD	EL-150W-FLOOD	EL-200W-FLOOD	EL-300W-FLOOD	EL-400W-FLOOD
Colour	5000k					
Lumen (lm)	6,877 lm	12,860 lm	19,050 lm	23,675 lm	38,035 lm	46,962 lm
Efficiency (Lm/w)	>131 lm/w	>126 lm/w	>125 lm/w	>118 lm/w	>127 lm/w	>118 lm/w
Light Source	SMD LED's					
CRI	Ra 80					
Beam Angle	120°			90° lens		
Power Requirement	AC 90~305V					
Power Consumption	52W	102W	152W	199W	298W	397W
Housing	Die Cast Aluminium and Tempered Glass					
Lifespan	<input type="checkbox"/> > 50,000 hours					
Operation Temp	-20°C~+45°C					
Dimensions (LxWxH)	337x269x52mm	394x394x56mm	445x392x56mm	445x392x64mm	503x545x64mm	503x545x64mm
Weight	3.5kg	4.5kg	5.2kg	5.4kg	9.6kg	10.1kg
Protection Rating	IP66					
Warranty	5 years					