



ELEVAGE
LIGHTING GROUP

Consult. Supply. *Illuminate.*

**Stadium
Lighting**

elevagegroup.com.au

TRIC MODULAR STADIUM

Product Features

Each module can be angled independently without tools
 Replace individual modules
 Surge protection 10kv and customized up to 20kv
 Available in 10, 30, 60, and 120° beam angles
 Die cast aluminium
 Dali options available

Electrical Parameters

High performance optics and uniform light distribution
 Luminaire output efficacy of 125LPW
 Standard CRI 70
 CCT 3,000k, 4,000k, 5,000k, 6,500k
 Input voltage AC100-277/AC240-480V
 Power Frequency 50/60Hz
 Power Factor 0.95
 Total Harmonic Distortion <15%
 Efficiency 92%
 Replaceable driver unit and control gear



TRIC ROUND STADIUM

Electrical Parameters

Voltage Range AC100-277V

Beam angles 20°, 40°, 60°, 80°

DMX Dali 1-10V Dimming

Zigbee Control Available

Meanwell Driver

Osram Chip



>50,000 hrs lamp life

Power factor >0.95

CRI >70

10KV Current Surge Input Protection

IP66 rated

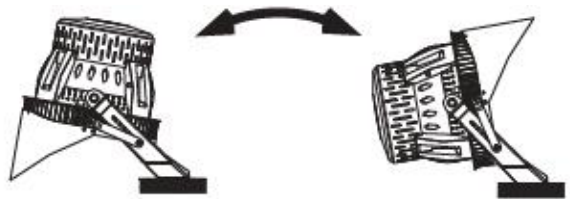

Adjustable angle 240°



Consult. Supply. *Illuminate.*

Elevage Lighting Group
6/8 Murphy St, O'Connor
Perth WA, 6163

sales@elevagegroup.com.au