

tric PATHWAY DOME Series


- Input Voltage AC120-277V
- Power Frequency 50/60Hz
- Spigot Size $\phi 76\text{mm}$
- >50,000 hrs lamp life
- Power factor >0.95
- Aluminium die casting
- Meanwell HLG Driver
- Tempered Glass Lens
- CRI >70
- Working Temp -30°C~+55°C
- IP65 rated



Style O



Style V

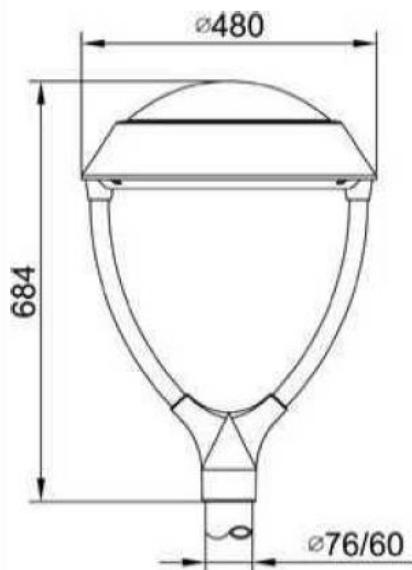

Model	Power	Lumens	Colour Temp	Beam Angles		
tric PATHWAY-DOME.O.60W3K	60w	5100lm	3000k	50° x 150°	120° x 120°	80° x 150°
tric PATHWAY-DOME.O.60W4K	60w	5400lm	4000k	50° x 150°	120° x 120°	80° x 150°
tric PATHWAY-DOME.O.60W5K	60w	5700lm	5000k	50° x 150°	120° x 120°	80° x 150°
tric PATHWAY-DOME.V.60W3K	60w	5100lm	3000k	50° x 150°	120° x 120°	80° x 150°
tric PATHWAY-DOME.V.60W4K	60w	5400lm	4000k	50° x 150°	120° x 120°	80° x 150°
tric PATHWAY-DOME.V.60W5K	60w	5700lm	5000k	50° x 150°	120° x 120°	80° x 150°



ELEVAGE
LIGHTING GROUP

Consult. Supply. Illuminate.

elevagegroup.com.au