


tric STREET BOX Series





- Dark Grey Frame
- Die Casting Aluminium
- Dimmable options available
- Voltage Range AC200-277V
- PC Optical Lens with toughened glass
- Horizontal or Vertical Installation
- Project based beam angles
- Upward Light Output Ratio (ULOR) = 0
- Integral 10KV Surge protection
- Power factor >0.92
- CRI >70
- IP66 rated
- IK10 rated

Model	Power	Lumens	Colour Temp	Weight (Kg)	Size (mm)		
					A	B	C
tric STREET-BOX125W3K	128w	16640lm	3000k	6.9	535.5	322.2	336.4
tric STREET-BOX125W5K	128w	16640lm	5000k	6.9	535.5	322.2	336.4
tric STREET-BOX125W6K	128w	16640lm	6000k	6.9	535.5	322.2	336.4
tric STREET-BOX150W3K	145w	18850m	3000k	6.9	535.5	322.2	336.4
tric STREET-BOX150W5K	145w	18850m	5000k	6.9	535.5	322.2	336.4
tric STREET-BOX150W6K	145w	18850m	6000k	6.9	535.5	322.2	336.4
tric STREET-BOX240W3K	240w	31200lm	3000k	7.9	617	322.3	416.2
tric STREET-BOX240W5K	240w	31200lm	5000k	7.9	617	322.3	416.2
tric STREET-BOX240W6K	240w	31200lm	6000k	7.9	617	322.3	416.2


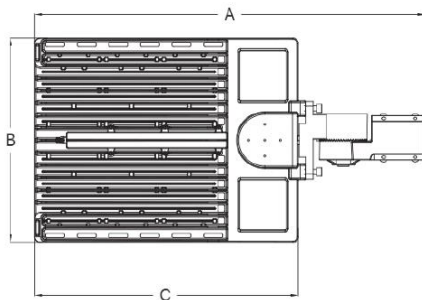


Photometry



TYPE II

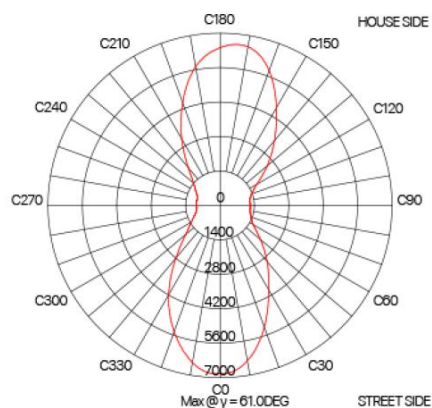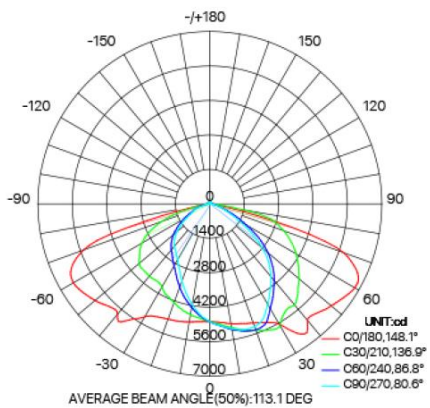



TYPE III

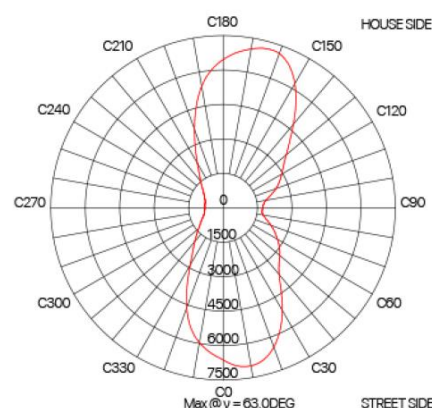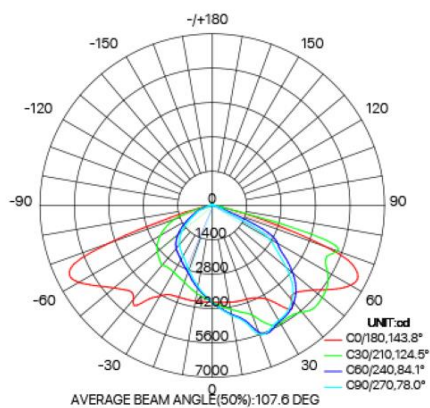

TYPE IV

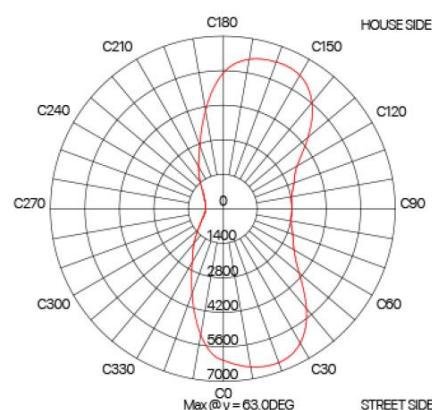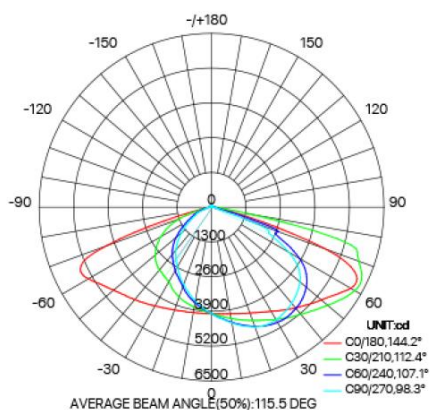


TYPE V

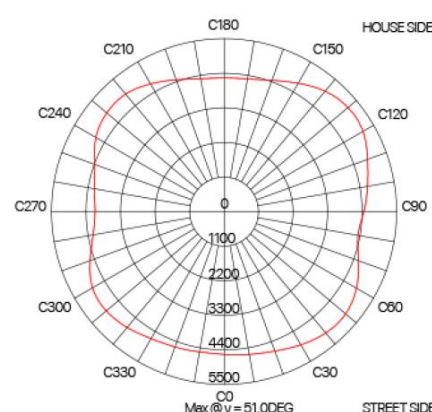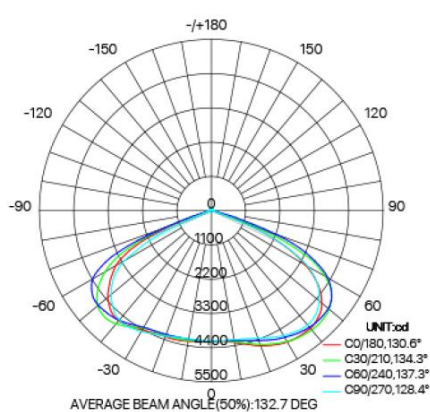


Pole Adaptors

tric BOX-SLIPFITTER

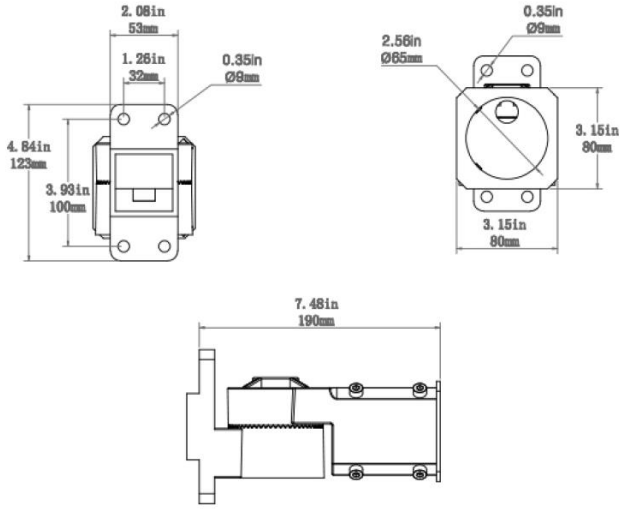


tric BOX-ROUNDPOLE

Round pole adaptor

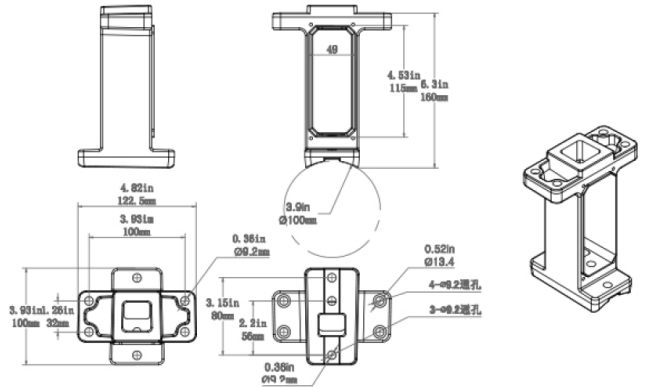

tric BOX-SQUAREPOLE

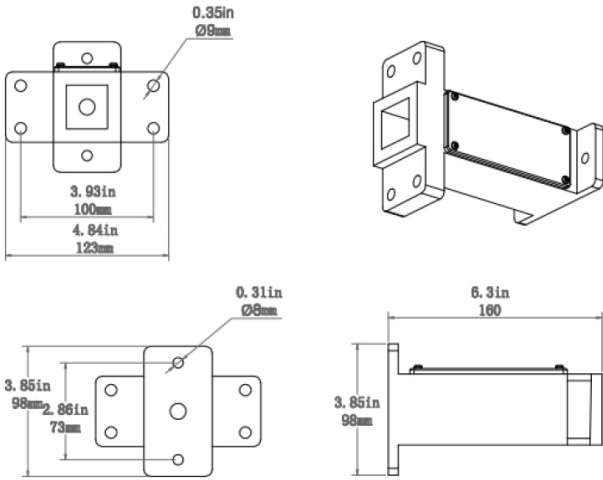

tric BOX-YOKE

