

tric STREET L Series



- Available in Black and Grey
- Dimmable options available
- Voltage Range AC200-277V
- Integral 6KV Surge protection
- Power factor >0.92 THD<10%
- IP66 rated
- IK09 rated
- Operating temperature -40°C to 45°C

Model	Power	Lumens	Colour Temp	Size (mm) L x W x H	Dimming Options		
					1-10V	Timer	DALI
tric STREET-L.36W4K	36w	4320lm	3800k	475 x 239 x 150	√	X	X
tric STREET-L.36W5K	36w	4320lm	4700k	475 x 239 x 150	√	X	X
tric STREET-L.36W6K	36w	4320lm	5500k	475 x 239 x 150	√	X	X
tric STREET-L.58W4K	58w	7540lm	3800k	649 x 305 x 197	√	√	√
tric STREET-L.58W5K	58w	7540lm	4700k	649 x 305 x 197	√	√	√
tric STREET-L.58W6K	58w	7540lm	5500k	649 x 305 x 197	√	√	√
tric STREET-L.115W4K	115w	13800lm	3800k	649 x 305 x 197	√	√	√
tric STREET-L.115W5K	115w	13800lm	4700k	649 x 305 x 197	√	√	√
tric STREET-L.115W6K	115w	13800lm	5500k	649 x 305 x 197	√	√	√
tric STREET-L.145W4K	145w	18600lm	3800k	871 x 376 x 240	√	√	√
tric STREET-L.145W5K	145w	19575lm	4700k	871 x 376 x 240	√	√	√
tric STREET-L.145W6K	145w	20300lm	5500k	871 x 376 x 240	√	√	√

tric STREET L Series

Mountings

- 36w - ϕ 50mm standard
 ϕ 60mm on request
- 58w - ϕ 60mm standard
 ϕ 76mm on request
- 115w - ϕ 60mm standard
 ϕ 76mm on request
- 145w - ϕ 60mm standard
 ϕ 76mm on request




Installation Options




- Installation height 3-12m
- All external screws are AISI 304 stainless steel
- 1.0m cable offered as standard. Other lengths available on request.

tric STREET L Series


Standard Beam Angles

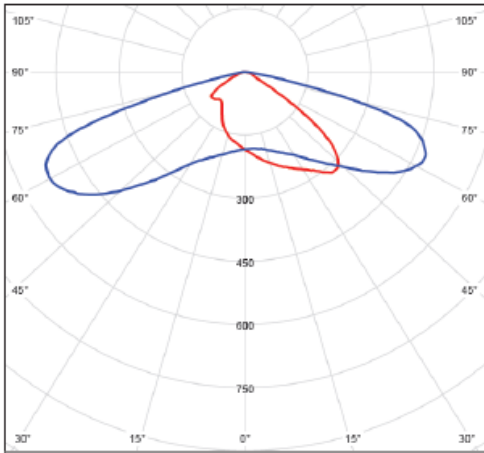


Type II

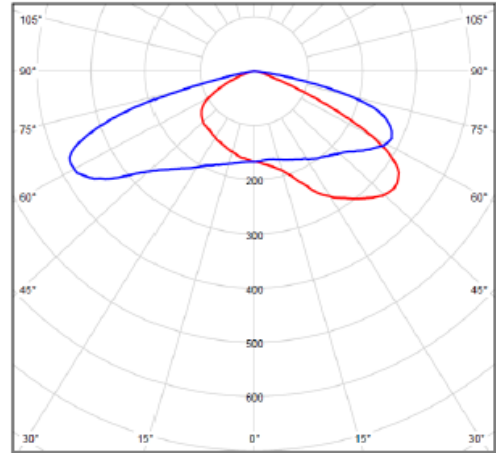

Type III

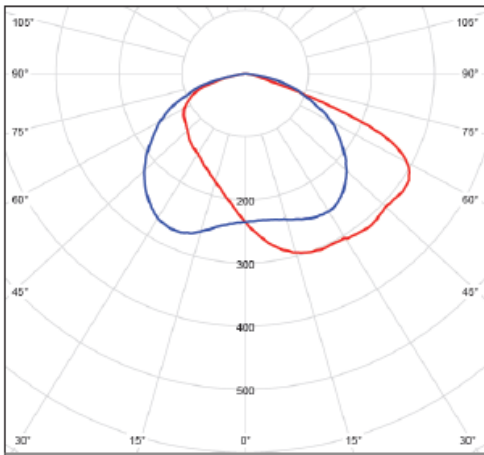

Type IV

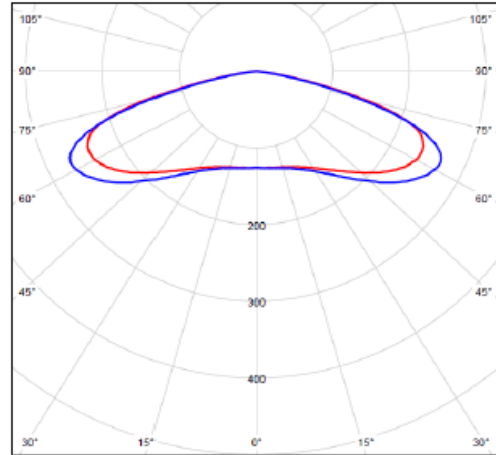

Type V

➤ Code Suffix for Lensing using Lens Options Chart
 Example – tric STREET-L.36W4K.V = Type V lensing

