

Consult. Supply. Illuminate.

LED Strip & Profile



# **LED Strip**


### TRIC TAPE SERIES

### **Product Features**

120° beam angle with uniform light distribution Luminaire output efficacy up to 100LPW Standard CRI90 CCT 3,000k, 4,000k, 6,000k 0-10v and 1-10v dimmable, DALI control IP20 & IP65 Operating temp -20°C to 45°C

### Electrical Parameters

Cuttable at multiple lengths 5 metre length per roll Input voltage 24DC PF>0.92 at full load

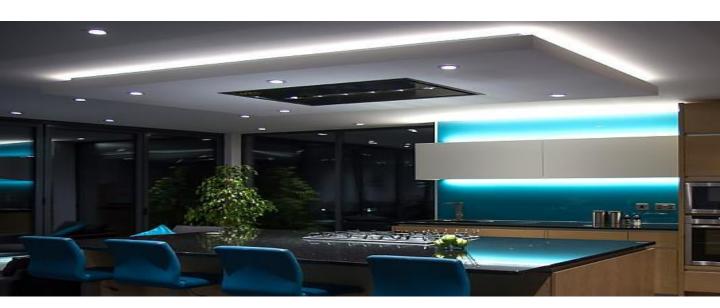















# **LED Strip**

### TRIC TAPE 14.4 RGBW SERIES

### **Product Features**

Red, Green, Blue, Warm White Strip Dali, DSI, 10vdc, DMX compatible DC24V SMD5050 60 LED's per metre Field cuttable in 100mm lengths



### TRIC PROFILE SERIES




Tric PROFILE-003



Tric PROFILE-004




Tric PROFILE-006



Tric PROFILE-007



Tric PROFILE-011



Tric PROFILE-013

For our full range, please refer to the Tric Profile datasheet













# Allumio

# **LED Strip**

### LINIJA SERIES

The Linija Series is a sophisticated and more durable alternative to LED tape. This is a great option where visible as it has a soft and uniformed luminance with no light spot, and seamless connections.



- DC24V
- **❖** CRI>80
- Cree chip 2835
- ❖ 3 Step MacAdam Ellipse
- ❖ Size (mm) 18 x 16
- ❖ Working Temperature -20 ~ 50°C
- ❖ IP20
- 2 year warranty
- Up to 20m per Driver











# Allumio

# LED Strip

### **NEON SERIES**

The Neon Series is a sophisticated side emitting LED Neon Flex and a more durable alternative to LED tape. This is a great option where visible as it has a soft and uniformed *luminance* with no light spot.



- Built for extreme environments
- ♣ DC24V
- **❖** CRI>80
- Cree chip 2835
- ❖ 3 Step MacAdam Ellipse
- Variety of sizes
- ❖ Working Temperature -20 ~ 50°C
- ❖ IP67
- ❖ Available in a wide range of sizes.













# Consult. Supply. Illuminate.

Elevage Lighting Group 6/8 Murphy St, O'Connor Perth WA, 6163