


tronic LINEAR SIDE THROW Series



- Suspended or Surface Mount
- Extrusion angle 45°
- Beam angle 80°
- Lifud Flicker Free Driver
- Input Voltage AC 200-240V – 50/60HZ
- Output Voltage DC27-38V
- Dimming Available
- >50,000 hrs lamp life
- Power factor >0.90
- SDCM>3
- IP20
- CRI >90

Model	Colour	Power	Lumens	Colour Temp	Size (mm) L x W x H
tronic OTP-LINEAR-40W3K.1200	BLK WHT SIL	40w	2700lm	3000k	1200x33x80
tronic OTP-LINEAR-40W4K.1200	BLK WHT SIL	40w	2800lm	4000k	1200x33x80
tronic OTP-LINEAR-40W5K.1200	BLK WHT SIL	40w	2900lm	5000k	1200x33x80
tronic OTP-LINEAR-40W6K.1200	BLK WHT SIL	40w	3000lm	6000k	1200x33x80

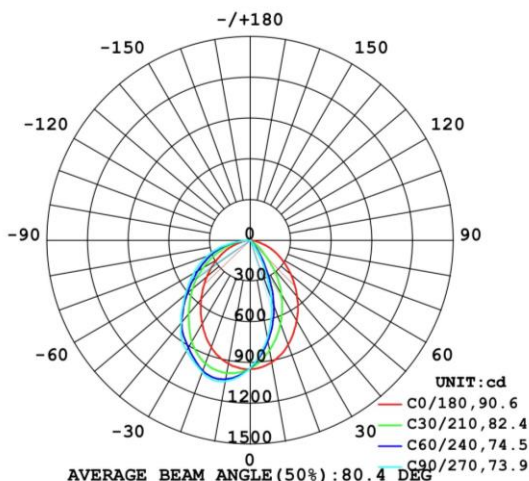

- Available in Black, Silver and White finish
- Dimming Protocols – Trailing Edge
Leading Edge
Dali

