


allumio

VIOLENTO

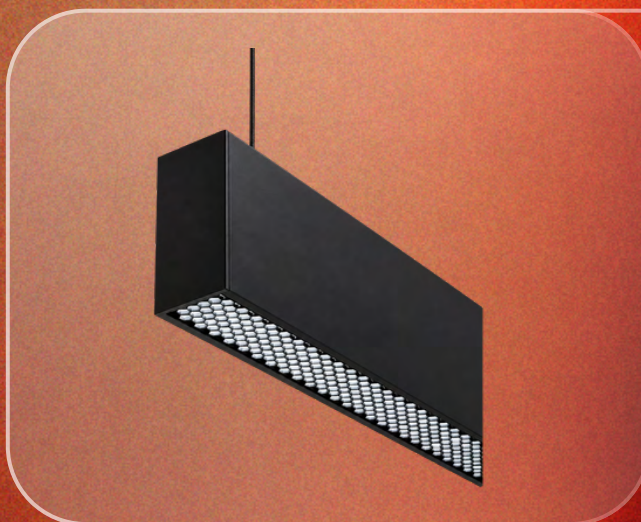

LINEAR

a product data sheet by
Elevage Lighting Group



VIOLENTO linear range combines luxury with advanced functionality, featuring a dual diffuser system that ensures exceptionally low UGR (Unified Glare Rating) for a comfortable lighting experience. This elegant series allows for customizable configurations, offering both linked and standalone options, while its refined design enhances any upscale environment.

 Anglesea Fremantle, WA

a product data sheet by

Elevage Lighting Group

KEY FEATURES

- CRI: > 90
- 3 Step MacAdam ellipse
- 80 lumens per watt
- UGR <16
- Voltage range: AC200-240V
- Power factor: >0.90
- IP20 rated
- Beam angle: 105°
- SDCM: 3
- Epistar Chip
- Working temperature -20 ~ 50°C
- 50,000 hours lamp life





PRODUCT CONFIGURATION GUIDE

VIOLENTO range is available in the following structure to suit your project requirements.

Available Options

- Power: 30W, 40W, 50W (simplified on table for code purposes)
- Colour Temperature (CCT): 3000K, 4000K, 5000K (simplified on table for code purposes)



Image: VIOLENTO in white and silver finish

STRUCTURE				MEASUREMENT		
Power (Wattage)	CCT (K)	Control	Colour	Length (mm)	Width (mm)	Height (mm)
30	• 3 • 4 • 5	• 0-10V Dimming (LUTRON) • Dimming (DIM) • DALI	• Black (B) • White (W) • Silver (S)	900	40	86
40				1200	40	86
50				1500	40	86

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

VIOLENTO

-

-

-

-

-

(Range Name)

(Power)

(CCT)

(Control)

(Colour)



a product data sheet by

Elevage Lighting Group