


eLEDtric

FLOOD

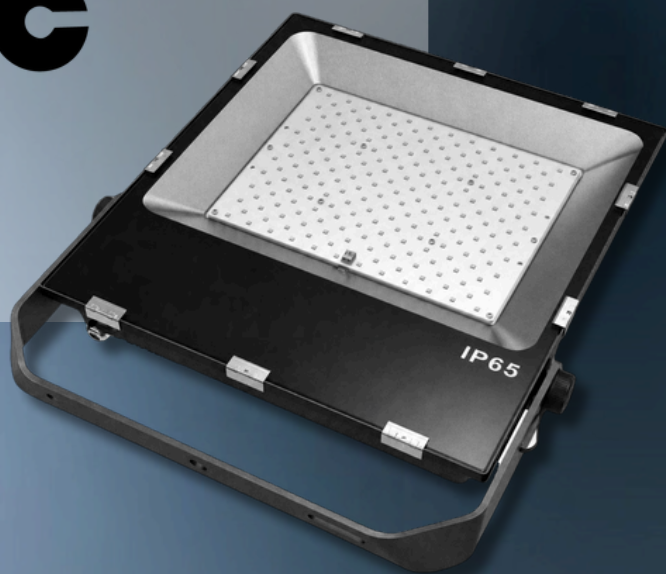

Details

FLOOD lights provide powerful, wide-angle illumination, making them ideal for enhancing visibility in both outdoor and indoor commercial settings. Perfect for parking areas, billboards, and common spaces, these lights ensure safety and security while creating a welcoming environment.




Image: showing the controls of the wattage and colour temperature of the flood light

Key Features

- Aluminium die cast housing
- 4KV surge protection
- 270° rotatable bracket
- IK08 Impact rating
- Standard beam angle: 120°
- Voltage 100-277VAC
- SMD2835
- Power Factor: >0.95
- 140 lumens per watt
- CRI 70
- IP66 Rated
- Operating temperature: -40°C~50°C



Hazelmere, WA



Linfox, Hazelmere WA

eLEDtric Across Australia

Our eLEDtric lighting solutions are installed in projects across Australia, delivering reliable, high-performance illumination in a wide range of industrial environments. One of these projects is Linfox Hazelmere, Perth WA, where our lighting helps create a bright, safe, and highly efficient working experience.

Product Configuration Guide

The **tric FLOOD** range is available in the following structure and measurements options to suit different project requirements.

Available Options

- Power: Power Switchable (PS): 35W/ 50W/ 75W & 100W/ 150W/ 200W
- Colour Temperature (CCT): Colour Switchable (CS): 3000K/ 4000K/ 5000K (simplified on table for code purposes)

Structure		Measurements			
Power (Wattage)	CCT (K)	Length (mm)	Height (mm)	Width (mm)	Weight (kg)
PS: 35W/50W/75W label as 75W on code	Colour Switchable (CS)	240	200	45	1.48
PS: 100W/150W/200W label as 200W on code		380	350	63	4.2

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

tric FLOOD - - **CS**

(Range Name) (Power) (CCT)

label **75W** or **200W**

