


eLEDtric

HALO

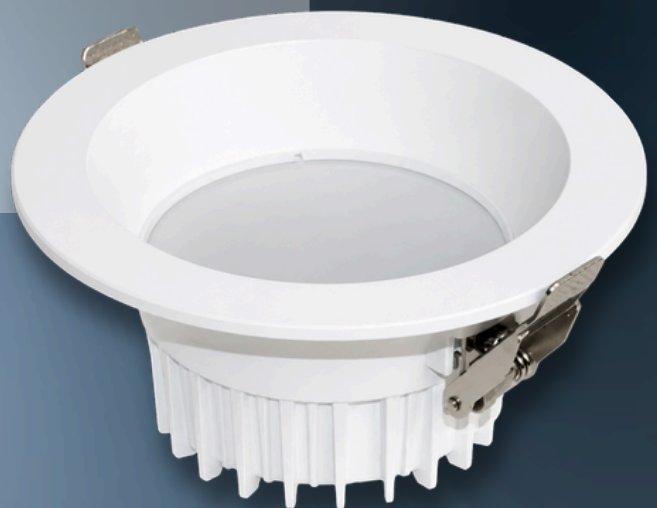

Details

HALO downlight is a versatile lighting solution with a wider beam angle that effectively illuminates any space while minimizing glare. Ideal for commercial settings, it ensures bright, even lighting throughout the area.

Key Features

- UGR <22
- Cree Chip
- Dimming Option Available
- White frame
- CRI 90
- 100 Lumens per watt
- Standard Beam Angle: 110°
- 3-Step MacAdam Ellipse
- Voltage Range: AC 100-240V
- Power Factor: >0.91
- IP40 Rated
- 50,000 Hours Lamp Life



Edwardstown, SA

eLEDtric Across Australia

Our eLEDtric lighting solutions are installed in projects across Australia, delivering reliable, high-performance illumination in a wide range of commercial environments. One of these projects is Blooms The Chemist, Castle Plaza, Edwardstown SA, where our lighting helps create a bright, welcoming retail experience.



Blooms The Chemist, Castle Plaza

Product Configuration Guide

The **tric HALO** range is available in the following structure and measurement options to suit different project requirements.

Available Options

- Power: 10W, 15W, 20W, 30W
- Colour Temperature (CCT): 3000K, 4000K, 5000K, 6000K (simplified on table for code purposes)
- Control: Switch (S), Dimming (DIM) or DALI
- Various measurements

Structure			Measurements		
Power (Wattage)	CCT (K)	Control	Diameter (mm)	Height (mm)	Cutout (mm)
10W	• 3K • 4K • 5K • 6K	• Switch (S) • Dimming (DIM) • DALI	117	60	90
15W			170	80	140
20W			192	90	160
30W			230	102	200

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

tric HALO - - -

(Range Name) (Power) (CCT) (Control)

