


eLEDtric

LINEAR DUO

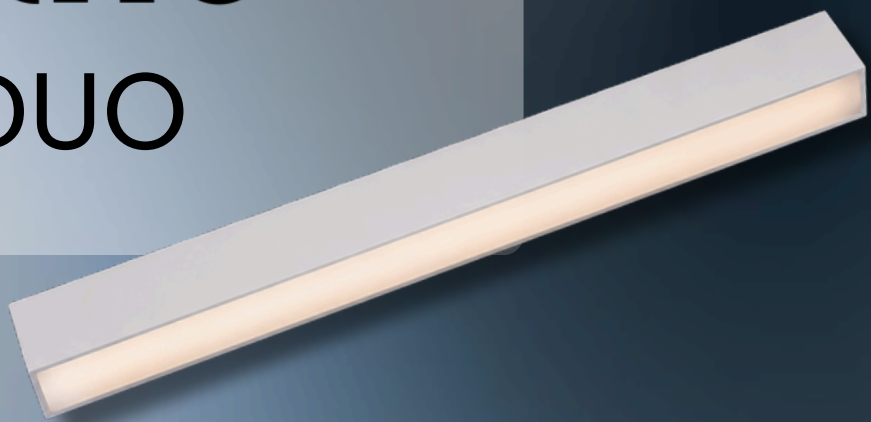

Details

LINEAR DUO is an elegant lighting solution that reflects light both upwards and downwards, creating a captivating accent that enhances any space. Ideal for showrooms, it illuminates the area while fostering a sense of openness and brightness, even in darker environments.

Key Features

- Suspended Mounting
- Beam Angle: 110°
- Edison 2835 LED
- Voltage: AC 100-277V
- Lamp Life: >50,000 hours
- Power Factor: >0.90
- IP20 Rating
- CRI: >90
- 3-Step MacAdam Ellipse
- UGR 19
- Operating Temperature: -25°C to +45°C



O'Connor, WA



Tesla Perth, O'Connor

eLEDtric Across Australia

Our eLEDtric lighting solutions are installed in projects across Australia, providing reliable, high-performance illumination for a range of commercial environments. At Tesla O'Connor in Perth, our lighting enhances the modern showroom with bright, clean and consistent illumination.

Product Configuration Guide

The **tric LINEAR DUO** range is available in the following structure and measurements options to suit different project requirements.

Available Options

- Power: 30W, 40W, 50W, 60W, 70W
- Colour Temperature (CCT): 3000K, 4000K, 5000K, 6000K (simplified on table for code purposes)
- Control: Switch (S), Dimming (DIM) or DALI
- Various measurements and body colour

Structure				Measurements		
Power (Wattage)	CCT (K)	Control	Body Colour	Length (mm)	Width (mm)	Height (mm)
30W Downward: 20W Upward: 10W	• 3K • 4K • 5K • 6K	• Switch (S) • DIMMABLE (DIM) • DALI	• Black (BLK) • White (WHT) • Silver (SIL)	600	72	80
40W Downward: 27W Upward: 13W				900	72	80
50W Downward: 33W Upward: 17W				1200	72	80
60W Downward: 40W Upward: 20W				1500	72	80
70W Downward: 54W Upward: 26W				1800	72	80

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

tric LINEAR DUO -

(Range Name)

(Power)

(CCT)

(Control)

(Body Colour)

