


eLEDtric

LINEAR RING

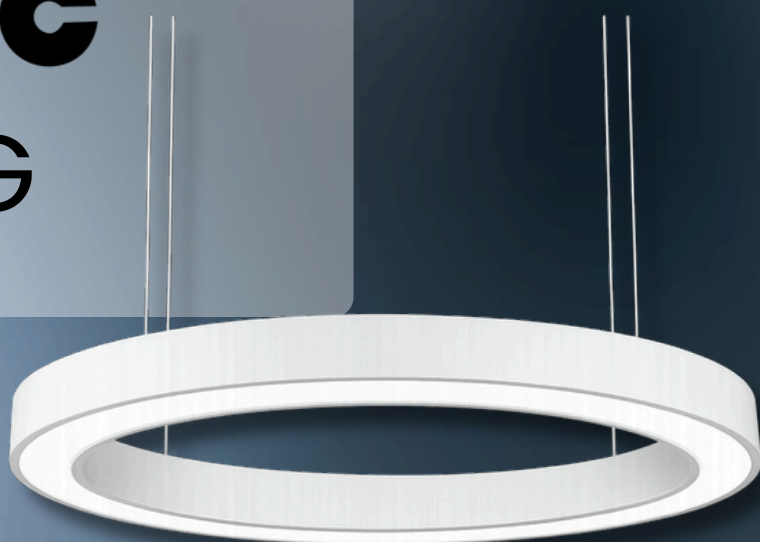

Details

LINEAR RING lights offer a sleek and stylish design that encourages creativity in your lighting arrangements. With the flexibility to be used as singular feature pendants or grouped together to form stunning patterns, they add a modern touch to any space.

Key Features

- Suspended or surface mounting
- Beam Angle: 120°
- 100 Lumens per watt
- UGR: 19
- Voltage: AC 200-240V
- Power Factor: >0.90
- IP20 Rating
- CRI: >90
- 3-Step MacAdam Ellipse
- Lamp Life: >50,000 hours



Two Rocks, WA



Tavern At The Rocks, Two Rocks

eLEDtric Across Australia

Our eLEDtric lighting solutions are installed in projects across Australia, delivering reliable, high-performance illumination across diverse commercial spaces. At Tavern at the Rocks, Two Rocks WA, our lighting creates a warm and welcoming atmosphere for guests to relax, dine and connect.

Product Configuration Guide

The **tric LINEAR RING** range is available in the following structure and measurements options to suit different project requirements.

Available Options

- Power: 60W, 80W, 120W, 150W, 250W
- Colour Temperature (CCT): 3000K, 4000K (simplified on table for code purposes)
- Various measurements and body colour

Structure				Measurements		
Power (Wattage)	CCT (K)	Control	Body Colour	Length (mm)	Width (mm)	Height (mm)
60W	• 3K • 4K	• Switch (S) • Dimmable (DIM) • DALI	• Black (BLK) • White (WHT)	800	60	80
90W				1200	60	80
120W				1500	60	80
150W				2000	60	80
230W				3000	60	80

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

tric LINEARRING -

(Range Name)

- (Power)

- (CCT)

- (Control)

- (Body Colour)

