


eLEDtric

OYSTER



Details

OYSTER light features a wide 120-degree beam angle, providing extensive light distribution ideal for illuminating large surface areas. Its broad coverage makes it perfect for spaces that require even, comprehensive lighting to ensure a well-lit environment.

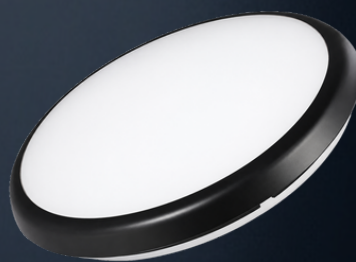

Key Features

- 3 colour switchable
- Dual power
- White and black frame
- CRI 80
- V0 fire resistance rating
- 130 Lumens per watt
- Standard Beam Angle: 120°
- Voltage Range: AC 185-265V
- Power Factor: >0.9
- IP54 Rated
- 30,000 Hours Lamp Life



eLEDtric Across Australia

Our eLEDtric general lighting solutions deliver reliable, high-performance illumination across a wide range of commercial environments, creating bright, comfortable and welcoming spaces.



Product Configuration Guide

The **tric OYSTER** range is available in the following structure and measurements options to suit different project requirements.

Available Options

- Power: Power Switchable (PS): 18W/ 24W
- Colour Temperature (CCT): Colour Switchable (CS): 3000K, 4000K, 6000K (simplified on table for code purposes)
- Control: Dimming (DIM)

Structure				Measurements	
Power (Wattage)	CCT (K)	Control	Frame Colour	Diameter (mm)	Height (mm)
Power Switchable (PS)	Colour Switchable (CS)	• Dimming (DIM)	• Black (BLK) • White (WHT)	300	42

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

tric OYSTER - PS - CS -

(Range Name) (Power) (CCT) (Frame Colour)

