

eLEDtric

PROFILE



Details

PROFILE range features aluminium extrusions that provide effective heat dissipation and protection for LED strips. Available options include recessed Profiles for cabinetry, 45° surface-mounted Profiles for angled corner lighting, and standard surface-mounted Profiles for general applications.

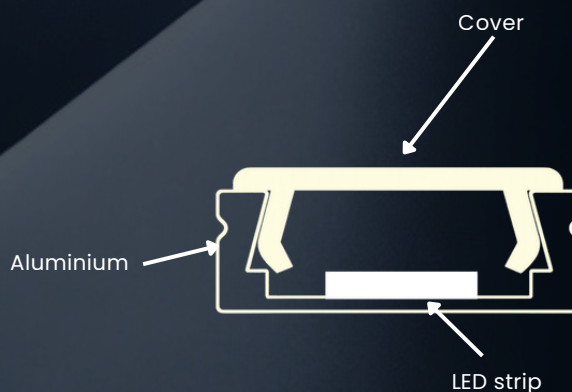


Image: Sample diagram illustrating the components of the Profile

Key Features

Aluminium Parameters

Material:	Aluminium alloy
Anodized Thickness:	10µm
Mounting:	Surface, Recessed
Colour:	Aluminium Silver

Cover Parameters

Material:	PMMA
Mounting:	Clip the cover to the aluminium profile from the top
Diffuser Type:	Frosted/UGR19 Achievable
Transmittance:	72%



Perth, WA



The Meat & Wine Co

eLEDtric Across Australia

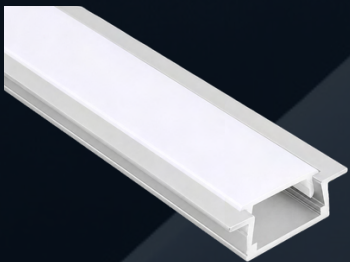
Our eLEDtric lighting solutions are installed in projects across Australia, delivering reliable, high-performance illumination in a wide range of commercial environments. One of these projects is The Meat & Wine Co, Perth in Perth, WA , where our lighting helps create a bright, welcoming dining experience.

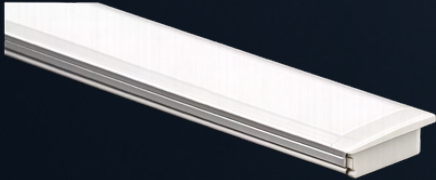

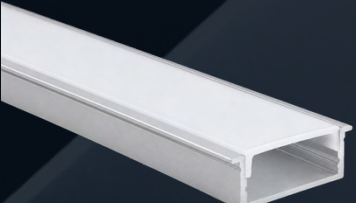
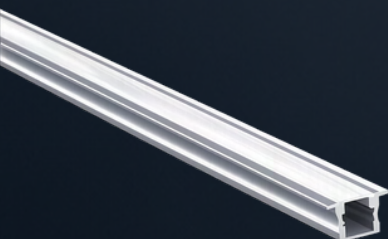
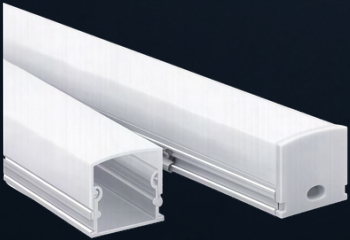

Product Configuration Guide






The **tric PROFILE** range is available in the below structure and measurement options to suit different project requirements.

Select the **Range Name with the Code** from the table below.

Standard profile length: 2 metres.

Structure		Measurements
Range Name (with Code)	Product Image	Cross Section (mm)
tric PROFILE 001		
tric PROFILE 002		
tric PROFILE 003		

Structure		Measurements
Range Name (with Code)	Product Image	Cross Section (mm)
tric PROFILE 004		
tric PROFILE 007		
tric PROFILE 008		
tric PROFILE 012		
tric PROFILE 013		

Structure		Measurements
Range Name (with Code)	Product Image	Cross Section (mm)
tric PROFILE 017		
tric PROFILE 021		
tric PROFILE 024		



5 year warranty

