

eLEDtric

SABLE



Details

SABLE bollards offer a modern, streamlined design that brings subtle illumination to outdoor environments. Built for both form and function, they deliver clean, directional light with a refined architectural presence.

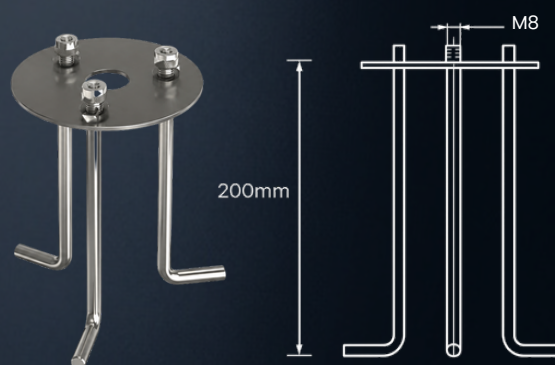


Image: diagram illustrating the footing of the Tric Sable

Key Features

- High corrosion resistance die-cast copper-free aluminium body with Aluminium profile
- Beam Angle: 360° symmetrical light distribution
- Electronic power supply 220/240V 50/60Hz built-in or AC120-277V/DC12-24V
- Power Factor: >0.90
- IP65 Rating
- IK08
- 3 step MacAdam Ellipse
- 42 lumens per watt
- CRI: >80



Fremantle, WA



Garde Hotel, Fremantle

eLEDtric Across Australia

Our eLEDtric lighting solutions are installed in projects across Australia, delivering reliable, high-performance illumination across a diverse range of commercial environments. One of these projects is Garde Hotel, Fremantle WA, where our lighting enhances the venue with a warm, inviting atmosphere while providing functional, energy-efficient illumination for guests and staff alike.

Product Configuration Guide

The **tric SABLE** range is available in the following structure and measurement options to suit different project requirements.

Available Options

- Colour Temperature (CCT): 3000K, 4000K, 5000K (simplified on table for code purposes)
- Body Colour: Matt Black (BLK), Grey (GRY), Bronze (BRZ)
- Various measurements



Image: diagram illustrating the different height of the Tric Sable

Structure			Measurements	
Power (Wattage)	CCT (K)	Body Colour	Height (mm)	Width (mm)
24W	• 3K • 4K • 5K	• Matt Black (BLK) • Grey (GRY) • Bronze (BRZ)	250	152
			600	
			800	
			1000	

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

tric SABLE - 24W - **-** **-** **-**

(Range Name) (Power) (CCT) (Body Colour) (Height)

