


eLEDtric

SKYLITE

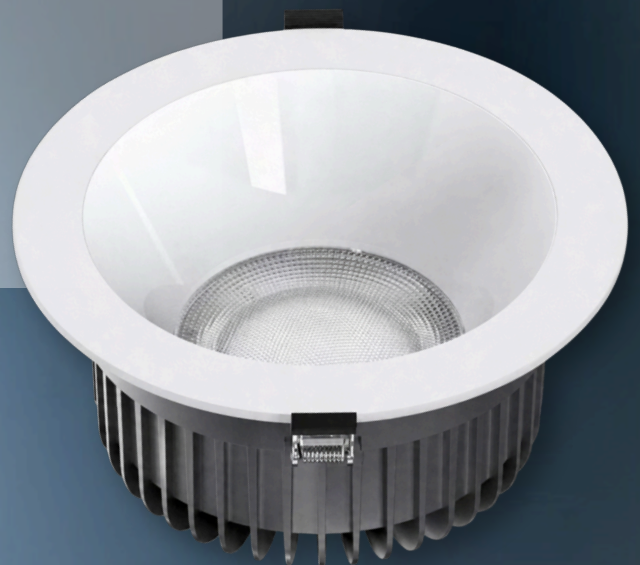

Details

SKYLITE downlight is a versatile lighting solution with narrow beam angle options that effectively illuminates any space with focus and precision while minimizing glare. Ideal for commercial settings, it ensures bright, even lighting throughout the area.




Key Features

- UGR < 19
- Cree Chip
- Dimming Option Available
- White frame
- CRI 90
- 100 Lumens per watt
- 60° Beam Angle with Options: 24/36°
- 3 Step MacAdam Ellipse
- Voltage Range: AC 200-240V
- Power Factor: >0.91
- IP54 Rated
- 50,000 Hours Lamp Life



eLEDtric Across Australia

Our eLEDtric lighting solutions are installed in projects across Australia, delivering reliable, high-performance illumination in a wide range of commercial environments.

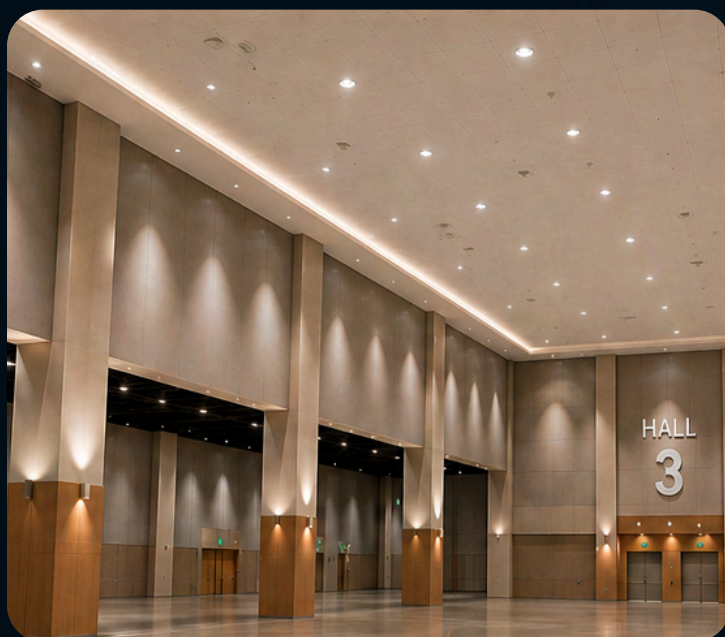

Product Configuration Guide

The **tric SKYLITE** range is available in the following structure and measurement options to suit different project requirements.

Available Options

- Power: 12W, 15W, 20W, 30W, 50W
- Colour Temperature (CCT): 3000K / 4000K / 6000K (simplified on table for code purposes)
- Control: Switch (S), Dimmable (DIM), DALI

Structure			Measurements		
Power (Wattage)	CCT (K)	Control	Diameter (mm)	Height (mm)	Cutout (mm)
12W	• 3K • 4K • 6K	• Switch (S) • Dimmable (DIM) • DALI	100	70	90
15W			120	80	110
20W			150	90	140
30W			175	100	165
50W			230	110	200

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

tric SKYLITE -

(Range Name)

-

(Power)

-

(CCT)

(Control)



ELEVAGE
LIGHTING GROUP