


eLEDtric

STRIKER

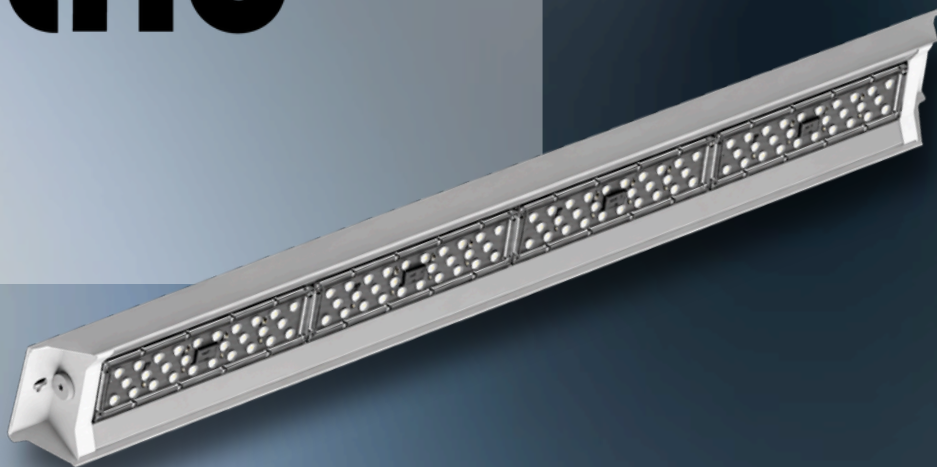

Details

STRIKER is a high-performance luminaire designed for gymnasiums and sports venues, offering exceptional durability, impact resistance, and energy efficiency. Its lightweight body and quick-connect system ensure fast, overhead installation with minimal disruption.

Key Features

- Housing is gloss white powder coated on cold-rolled steel, other colour painted on request;
- Extruded Aluminium heat sink with anodic oxidation treatment, Colour Aluminium grey.
- Optical lenses are clear injection molded Polycarbonate materials UV and Fire protected
- Beam angle: 30° / 60° / 90° and Asymmetric
- CRI 90
- 150 Lumens per watt
- SDCM <3
- IP66
- IK10
- Power factor > 0.92 at 230V full load, THD < 12%;
- Voltage Range: AC 200-240V
- 100,000 Hours Lamp Life



eLEDtric Across Australia

Our eLEDtric lighting solutions are installed in projects across Australia, delivering reliable, high-performance illumination across a wide range of commercial environments. In gymnasiums and indoor sporting facilities, our lighting provides bright, uniform illumination to enhance visibility, safety and performance.

Product Configuration Guide

The **tric STRIKER** range is available in the following structure and measurement to suit different project requirements.

Available Options

- Power: 50W, 75W, 100W
- Colour Temperature (CCT): 3000K / 4000K / 5000K / 6000K (simplified on table for code purposes)
- Control: Switch (S), DALI

Structure			Measurements		
Power (Wattage)	CCT (K)	Control	Length (mm)	Width (mm)	Height (mm)
50W	• 3K • 4K • 5K • 6K	• Switch (S) • DALI	1174	132	52
75W					
100W					

Ordering Code Structure

Based on the product configuration guide above, the product code is:

tric STRIKER - - -

(Range Name) (Power) (CCT) (Control)

