

eLEDtric

ZENO



Details

ZENO downlight features a sleek and sophisticated design that minimizes glare, ensuring a well-lit area without overpowering the space with excessive brightness.



Key Features


- UGR < 19
- Cree Chip
- Dimming Option Available
- White Frame (*Black available upon request*)
- CRI 90
- 100 Lumens per watt
- Standard Beam Angle: 60°
- 3-Step MacAdam Ellipse
- Voltage Range: AC 200-240V
- Power Factor: >0.91
- IP20 Rated
- 50,000 Hours Lamp Life



Mackay, QLD

eLEDtric Across Australia

Our eLEDtric lighting solutions are installed in projects across Australia, delivering reliable, high-performance illumination in a wide range of commercial environments. One of these projects is Telstra, Caneland Central, Mackay QLD, where our lighting helps create a bright, welcoming retail experience.

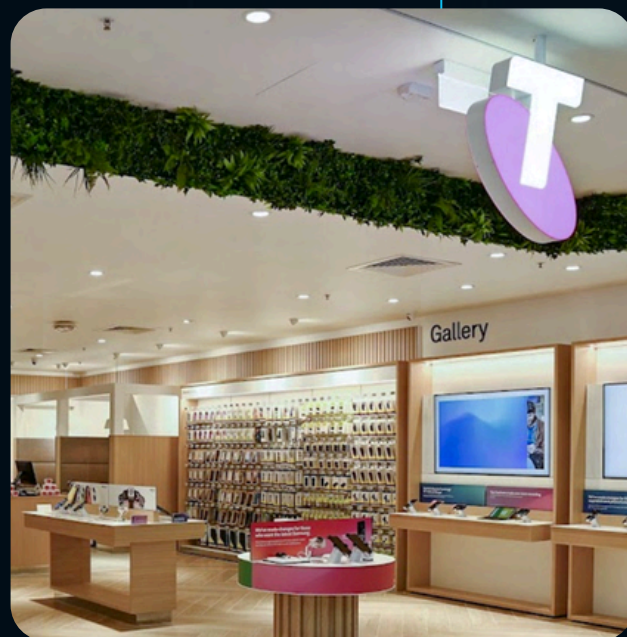

Telstra, Caneland Central

Product Configuration Guide

The **tric ZENO** range is available in the following structure and measurements options to suit different project requirements.

Available Options

- Power: 5W, 8W, 12W, 20W, 30W
- Colour Temperature (CCT): 3000K, 4000K, 5000K, 6000K (simplified on table for code purposes)
- Control: Dimming (DIM) or DALI
- Various measurements

Structure			Measurements		
Power (Wattage)	CCT (K)	Control	Diameter (mm)	Height (mm)	Cutout (mm)
5W	• 3K • 4K • 5K • 6K	• Dimming (DIM) • DALI	70	65	55
8W			80	75	70
12W			110	95	90
20W			140	108	127
30W			140	108	127

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

tric ZENO -

(Range Name)

-

(Power)

-

(CCT)

-

(Control)

