

LEDlux


CS DOWNLIGHT



DETAILS

CS DOWNLIGHT features a tri-colour switch, giving you the choice of warm white, cool white, or daylight to suit any setting. Its energy-efficient design delivers bright illumination while reducing power consumption, making it both versatile and eco-friendly.

SIDE ELEVATION

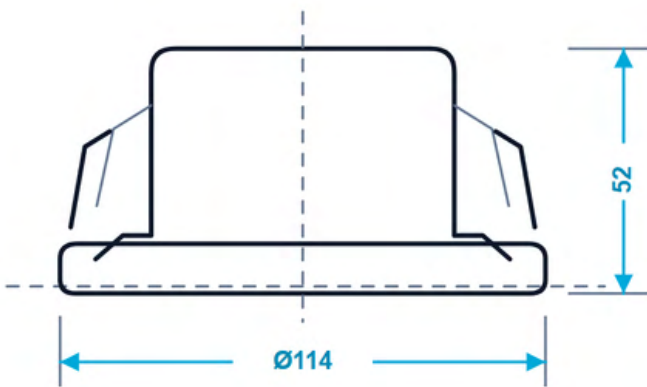

KEY FEATURES

- Tri-colour technology: 3000K Warm White / 4000K Cool White / 6000K Daylight
- Polyamide & Aluminium Heat Sink
- IP44 rated
- Triac Dimmable
- IC-4 rating

PRODUCT CONFIGURATION GUIDE

LUX CS DOWNLIGHT range is available in the below structure and measurement options to suit your project requirements.

Available Options

- Colour Temperature (CCT): Colour Switchable (CS): 3000K/ 4000K/ 6000K (simplified on table for code purposes)

STRUCTURE		MEASUREMENTS		
Power (Wattage)	CCT (K)	Length (mm)	Height (mm)	Cutout (mm)
10W	Colour Switchable (CS)	114	52	90

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

LUX-D - 10W - CS

(Range Name) (Power) (CCT)

 LEDlux

