

LEDlux

JUMBO



DETAILS

JUMBO EMERGENCY EXIT LIGHTS are designed for projects that require a discreet and streamlined emergency solution. It offers a professional, surface mount solution that integrates seamlessly into a warehouse and industrial spaces where large distances require a 40m visible range.

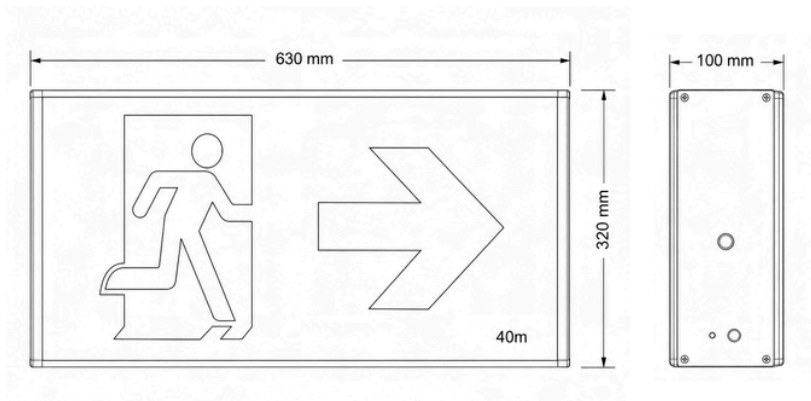


Image: Architectural dimension drawing showing the front and right-side elevations of an emergency exit sign

KEY FEATURES

- Polycarbonate Construction
- IP20 rated
- Operation Mode - Maintained
- Ceiling/Wall Mount
- Viewing distance: 40m
- Voltage: 220-240VAC
- Emergency rating C0: D12.5 C90: D8
- 3.2V LiFePO4 battery
- Class II Electrical rating
- 24 hours charging time, 180 minutes discharge time
- Standard Certification AS/NZS2293.3

PRODUCT CONFIGURATION GUIDE

LUXJUMBO range is available in the below structure and measurement options to suit your project requirements.

STRUCTURE	MEASUREMENTS		
Power (Wattage)	Length (mm)	Width (mm)	Height (mm)
6W	630	320	100

Ordering Code Structure

Based on the product configuration guide above, the product code is:

LUX-EMG-EXIT-JUMBO
(Range Name)

 LEDlux

