
allumio

AMARA

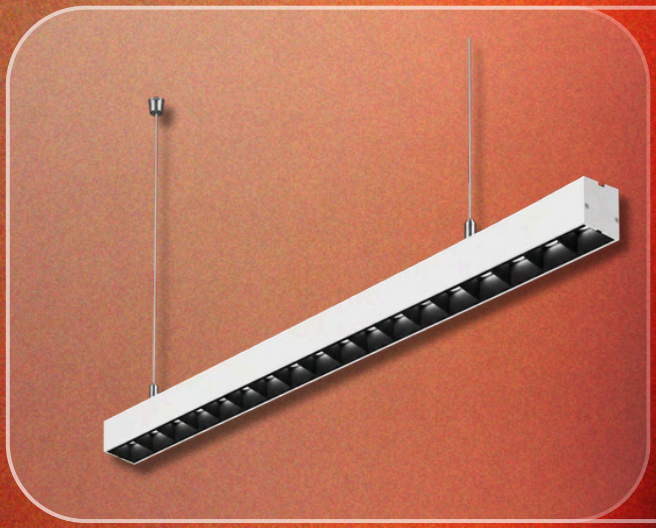

LINEAR

a product data sheet by

Elevage Lighting Group



AMARA

AMARA linear light pairs a sleek, minimalist design with outstanding flexibility, creating dynamic lighting effects with precision. Its refined luminaire body is perfect for architectural spaces and high-end offices, delivering both style and performance.

a product data sheet by

Elevage Lighting Group

KEY FEATURES

- Aluminium profile, powder coated
- CRI: > 90
- Power Factor: >0.95
- THD15%
- Anti-glare reflector polymer optics
- UGR: >19
- Input Voltage: 200-240Vac
- 36Vdc
- SDCM3
- IP20 rated
- IK02
- Beam angle: 86°
- Reflector: Matt black lacquer (115 lm/W), mirror electroplated (130lm/W), Pure white lacquer coating (125 lm/W)
- Surface mounted and suspension options available
- Operating temperature: -20°C ~50°C
- 100,000 hours lamp life



PRODUCT CONFIGURATION GUIDE

AMARA range is available in the following structure to suit your project requirements.

Available Options

- Power: 15W, 23W, 31W, 40W, 48W, 56W, 65W, 80W (simplified on table for code purposes)
- Colour Temperature (CCT): Colour Switchable (CS): 3000K / 4000K / 5000K/ 6000K (simplified on table for code purposes)

STRUCTURE				MEASUREMENT		
Power (Wattage)	**CCT** (K)	**Control**	**Colour**	**Length** (mm)	**Width** (mm)	**Height** (mm)
15	• Colour Switchable (CS)	• CCT switchable • 1-10V • DALI-2.0 • DALI DT8 Tunable white • Emergency 90 mins	• Black (B) • White (W) • Silver (S)	485	46	70
23				725	46	70
31				965	46	70
40				1205	46	70
48				1445	46	70
56				1685	46	70
65				1925	46	70
80				2405	46	70

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

AMARA - _____ - _____ - _____ - _____

(Range Name) (Power) (CCT) (Control) (Body Colour)

5 year warranty

allumio

a product data sheet by

Elevage Lighting Group