
eLEDtric

INGROUNDS

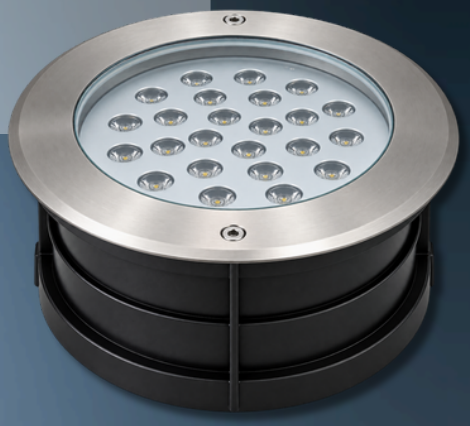

ELEVAGE LIGHTING GROUP

eLEDtric

Details

Our Ingrounds are designed for seamless integration into outdoor settings, these inground lights offer durable, low-profile illumination for pathways, driveways, and landscaped areas. Built to withstand the elements, they deliver reliable performance while enhancing the architectural and ambient appeal of exterior spaces.

Key Features

- 304 Stainless Steel with tempered glass
- Input voltage: 200-240V
- 100 lumens per watt
- Epistar chips
- IP66 rated
- IK08
- CRI: >80
- RGBW available
- Standard beam angle: 30°
- Also available in 8/15/45/15*60°
- Power factor: >0.9
- Temperature: -30°C to 45°C

ELEVAGE LIGHTING GROUP

eLEDtric





City of Bayswater Civic Centre, Bayswater

eLEDtric Across Australia

Our eLEDtric lighting solutions are installed in projects across Australia, delivering reliable, high-performance illumination in a wide range of commercial environments. One of these projects is City of Bayswater Civic Centre, Bayswater WA, where our inground lighting illuminates our Nations flags.

ELEVAGE LIGHTING GROUP

eLEDtric

Product Configuration Guide

The **tric INGROUND** range is available in the following structure and measurement options to suit different project requirements.

Available Options

- Power: 6W, 9W, 12W, 18W, 24W
- Colour Temperature (CCT): 3000K, 4000K, 5000K (simplified on table for code purposes)
- Control: Switch (S)
- Various measurements

Structure			Measurements		
Power (Wattage)	**CCT** (K)	**Control**	**Diameter** (mm)	**Height** (mm)	**Cutout** (mm)
6W	• 3K • 4K • 5K	• Switch (S)	130	95	120
9W			160	105	145
12W			180	125	165
18W			210	120	195
24W			230	125	215

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

tric INGROUND - _____ - _____ - _____

(Range Name) (Power) (CCT) (Control)

ELEVAGE LIGHTING GROUP

5 year warranty



ELEVAGE LIGHTING GROUP