
eLEDtric

LINEAR SQ

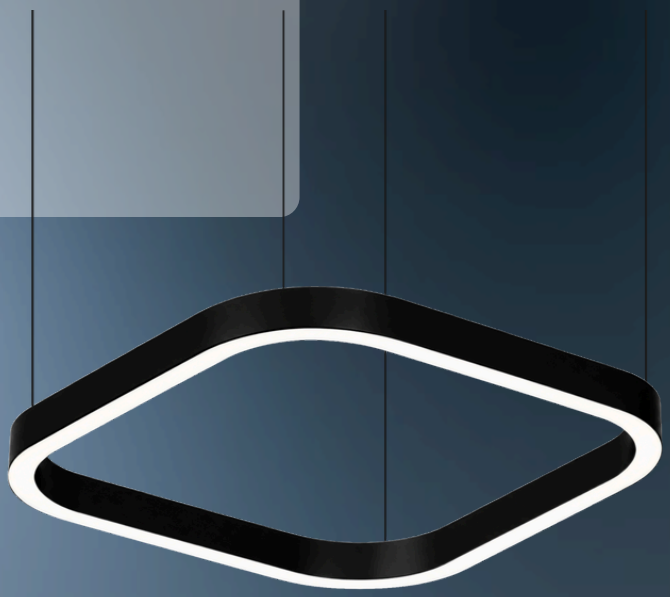

ELEVAGE LIGHTING GROUP

eLEDtric

Details

LINEAR SQ lights offer a flexible solution that seamlessly meets both lighting and design needs for any space. With customizable designs and the ability to change configurations as lighting requirements evolve, they provide a sleek, modern aesthetic that enhances simplicity and sophistication.

Key Features

- CRI 90
- 100 Lumens per watt
- Edison chip LED
- Flicker free driver
- 3 Step MacAdam Elipse
- Standard Beam Angle: 110°
- Emergency 10% light output for 90 minutes
- Input voltage: AC200-240V- 50/60HZ
- PF>0.92 at full load
- IP20 Rated
- 50,000 Hours Lamp Life
- UGR 19

ELEVAGE LIGHTING GROUP

eLEDtric



eLEDtric Across Australia

Our eLEDtric lighting solutions are installed in projects across Australia, delivering reliable, high-performance illumination in a wide range of commercial environments. One of these projects is Ellenbrook Fresh Market, WA, where our lighting helps create a bright, welcoming retail experience.

ELEVAGE LIGHTING GROUP

Product Configuration Guide

The **tric LINEAR-SQ** range is available in the following structure and measurements options to suit different project requirements.

Available Options

- Power: 75W
- Colour Temperature (CCT): 3000K, 4000K, 5000K, 6000K (simplified on table for code purposes)
- Control: Switch (S), Dimming (DIM) or DALI
- Various measurements and body colour

Structure				Measurements		
Power (Wattage)	**CCT** (K)	**Control**	**Body Colour**	**Length** (mm)	**Width** (mm)	**Height** (mm)
75w	• 3K • 4K • 5K • 6K	• Switch (S) • DIMMABLE (DIM) • DALI	• Black (BLK) • White (WHT) • Silver (SIL)	800*800	60	75

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

tric LINEAR - ____ - ____ - ____ - ____

(Range Name) (Power) (CCT) (Control) (Body Colour)



ELEVAGE LIGHTING GROUP