LEADlux

EXIT BOX



ELEVAGE LIGHTING GROUP

DETAILS

LUX EXIT BOX offers a universal solution in a modern architectually pleasing design. The double sided design makes it possible to include all diffuser combinations in both single and double sided applications. The front-slide base allows compatibility with common existing brands, while the flexible design supports both wall and ceiling mounting.



Image: The EXIT BOX in black frame

KEY FEATURES

- IP20 rated
- Emergency Classification: C0:D4; C90:D4
- Surface or Wall Mounted
- Test Switch located on front of the light
- Emergency Hours: 2 hours Backup
- Battery supply current 1300 mA
- Battery Type: 3.2 V $LiFePO_4$ (Lithium)
- Voltage: 220-240VAC, 50Hz
- Decals: Running Man (2) Left Arrow (1) Right Arrow (1)
- Fitting Warranty: 5 Years
- Battery Warranty : 3 Year
- Operating Temperature: 0°C to +40°C
- Connection: 1.2m Power Cable With SAA Plug

PRODUCT CONFIGURATION GUIDE

LUX EXIT BOX range is available in the below structure and measurement options to suit your project requirements.

Available Options

- Power: 2W
- Colour Temperature (CCT): 5000K
- Body Colour: Black (BLK), White (WHT)

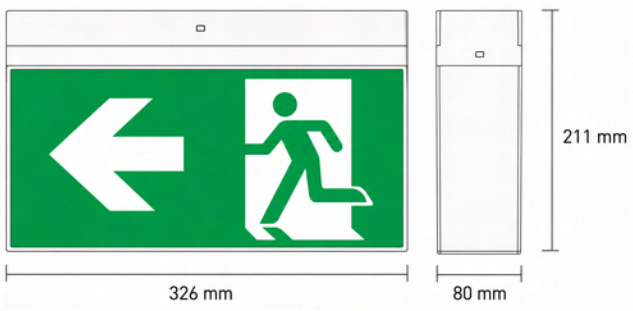


Image: Architectural dimension drawing of the exit sign

STRUCTURE			MEASUREMENTS		
Power (Wattage)	**CCT**	**Body Colour**	**Length** (mm)	**Width** (mm)	**Height** (mm)
2W	5K	• Black (BLK) • White (WHT)	326	80	211

Ordering Code Structure

Based on the product configuration guide above, the product code is:

LUX-EMG-EXIT BOX- _____

(Range Name) (Body Colour)

5 year warranty


LEADlux
ELEVAGE
LIGHTING GROUP