LEADlux

BATTEN



ELEVAGE LIGHTING GROUP

DETAILS

LUX BATTEN is a reliable and efficient lighting solution for a range of indoor environments. Designed for quick installation and clean, even light distribution, they're ideal for offices, classrooms, corridors, storerooms, and other general interior spaces.

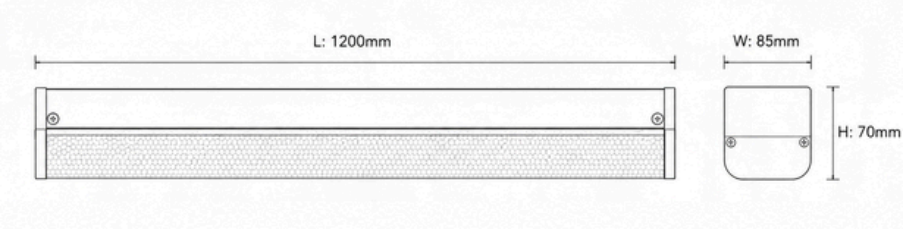


Image: dimensions of LUX BATTEN

KEY FEATURES

- Diffused face finish (SPCC + PC)
- SMD2835 led
- CRI>80
- IP20 Rated
- IK04
- Philips Xitanium Driver
- 145 lumens per watt
- Power factor:> 0.90
- Beam Angle: 120°
- Voltage Input AC200~240V
- Emergency Option
- Discharge time - 3 hrs
- AS/NZS 2293 Classification
- C0: D100, C90: D63
- Merrytek Sensor Optional

PRODUCT CONFIGURATION GUIDE

LUX BATTEN range is available in the below structure and measurement options to suit your project requirements.

Available Options

- Power: Power Selectable (PS): 22W /28W/ 34W/ 40W
- Colour Temperature (CCT): Colour Switchable (CS): 4000K / 5000K / 6000 (simplified on table for code purposes)
- Control: Switch (S), Sensor (SEN), Emergency (EMG)

STRUCTURE			MEASUREMENTS		
Power (Wattage)	**CCT** (K)	**Control**	**Length** (mm)	**Width** (mm)	**Height** (mm)
Power Selectable (PS)	Colour Switchable (CS)	• Switch (S) • Sensor (SEN) • Emergency (EMG)	1200	85	70

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

LUX-BAT - PS - CS - _____

(Range Name) (Power) (CCT) (Control)

5 year warranty


LEADlux
ELEVAGE
LIGHTING GROUP