LEADlux

RECESSED BLADE



ELEVAGE LIGHTING GROUP

DETAILS

RECESSED BLADE EXIT LIGHT offers a sophisticated design that meets architectural requirements for premium recessed installations. Its low-profile construction requires only 65mm of ceiling space and features a diffuser designed to minimize reflections and halo effects, ensuring a sleek and unobtrusive appearance.

KEY FEATURES

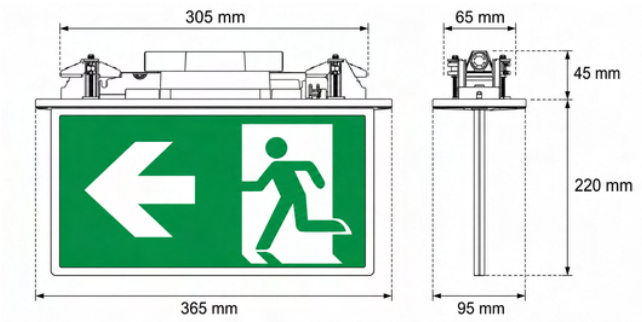
- IP20 rated
- Emergency Classification: D63
- Viewing distance: 24 meters
- Green Pilot light
- Test Switch located on front of the light
- Emergency Hours: 2 hours Backup
- Voltage: 220-240VAC, 50Hz
- Fitting Warranty: 5 Years
- Battery Warranty : 3 Year
- Operating Temperature: 0°C to +40°C
- Connection: 1.2m Power Cable With SAA Plug

PRODUCT CONFIGURATION GUIDE

LUX RECESSED BLADE range is available in the below structure and measurement options to suit your project requirements.

Available Options

- Power: 2W
- Colour Temperature (CCT): 6000K
- Body Colour: White (WHT)

STRUCTURE			MEASUREMENTS	
Power (Wattage)	**CCT**	**Body Colour**	**Dimensions** (mm)	**Cutout** (mm)
2W	6K	• White (WHT)		70

Ordering Code Structure

Based on the product configuration guide above, the product code is:

LUX-EMG-EXIT-REC-BLADE
(Range Name)

5 year warranty


LEADlux
ELEVAGE
LIGHTING GROUP