LEADlux

SURFACE BLADE



ELEVAGE LIGHTING GROUP

DETAILS

SURFACE BLADE EMERGENCY LIGHTS provide dependable emergency illumination in a slim, unobtrusive design. It blends into contemporary spaces while meeting all essential compliance requirements.

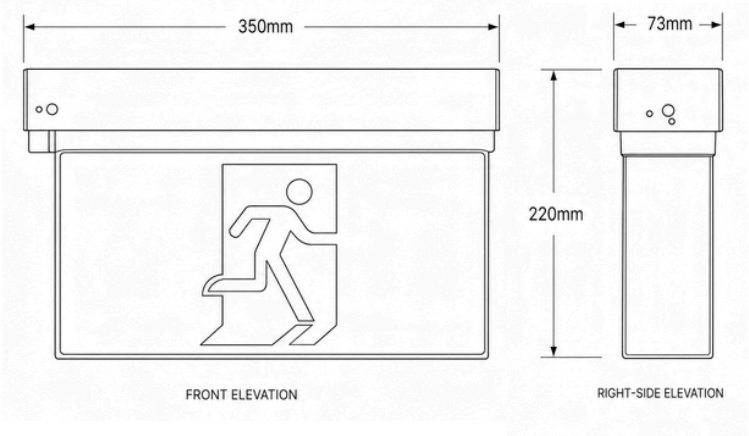


Image: Architectural dimension drawing showing the front and right-side elevations of an emergency exit sign

KEY FEATURES

- Injection-moulded ABS housing
- CRI<80
- IP rated
- Viewing distance: 24m
- Emergency rating C0: D12.5 C90: D8
- 3.2V LiFePO4 battery
- Class II Electrical rating
- 24 hours charging time, 180 minutes discharge time

PRODUCT CONFIGURATION GUIDE

LUX SURFACE BLADE range is available in the below structure and measurement options to suit your project requirements.

STRUCTURE	MEASUREMENTS		
Power (Wattage)	**Length** (mm)	**Width** (mm)	**Height** (mm)
2W	350	73	220

Ordering Code Structure

Based on the product configuration guide above, the product code is:

LUX-EMG-EXIT-SUR-BLADE
(Range Name)


LEADlux
ELEVAGE
LIGHTING GROUP