LEADlux

TRI BATTEN



ELEVAGE LIGHTING GROUP

DETAILS

LUX TRI BATTEN offer high luminous efficacy with a streamlined design for quick installation and long-term energy savings. With options like emergency backup, motion sensors, and adjustable colour temperatures and wattages, they're a versatile solution for classrooms, offices, corridors, shops, carparks, and gyms.

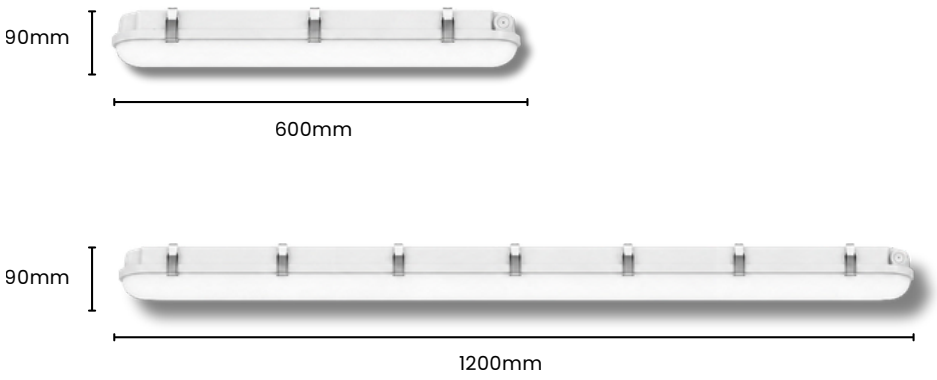


Image: two different dimensions of the TRI BATTEN

KEY FEATURES

- PC Cover and PC Base connected by Stainless clips
- CRI<80
- IP66 rated
- IK08
- Philips Xitanium Driver
- 145 lumens per watt
- Security rope for easy maintenance
- Beam Angle: 140°
- Voltage Input AC220~240V
- Emergency Option
- Discharge time - 3 hrs
- AS/NZS 2293 Classification C0: D100, C90: D63
- Merrytek Sensor Optional

PRODUCT CONFIGURATION GUIDE

LUX TRI BATTEN range is available in the below structure and measurement options to suit your project requirements.

Available Options

- Power: Power Selectable (PS): 24W /30W/ 35W/ 40W
- Colour Temperature (CCT): Colour Switchable (CS): 4000K / 5000K / 6000K (simplified on table for code purposes)
- Control: Switch (S), Sensor (SEN), Emergency (EMG)

STRUCTURE			MEASUREMENTS		
Power (Wattage)	**CCT** (K)	**Control**	**Length** (mm)	**Width** (mm)	**Height** (mm)
Power Selectable (PS)	Colour Switchable (CS)	• Switch (S) • Sensor (SEN) • Emergency (EMG)	600	125	90
			1200	125	90

Ordering Code Structure

Based on the product configuration guide above, use the format below to create your code:

LUX-TRI - PS - CS - _____ - _____

(Range Name) (Power) (CCT) (Control) (Length)

ELEVAGE LIGHTING GROUP

5 year warranty


LEADlux
ELEVAGE
LIGHTING GROUP