LEADlux

CS DOWNLIGHT



ELEVAGE LIGHTING GROUP

DETAILS

CS DOWNLIGHT features a tri-colour switch, giving you the choice of warm white, cool white, or daylight to suit any setting. Its energy-efficient design delivers bright illumination while reducing power consumption, making it both versatile and eco-friendly.

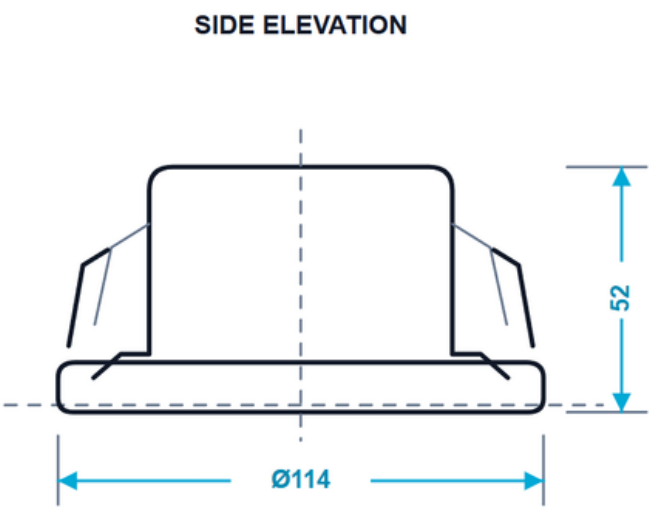


Image: Side-elevation drawing showing its recessed housing, mounting clips and slim circular trim

KEY FEATURES

- Tri-colour technology: 3000K Warm White / 4000K Cool White / 6000K Daylight
- Polyamide & Aluminium Heat Sink
- IP44 rated
- Triac Dimmable
- IC-4 rating

PRODUCT CONFIGURATION GUIDE

LUX CS DOWNLIGHT range is available in the below structure and measurement options to suit your project requirements.

Available Options

- Colour Temperature (CCT): Colour Switchable (CS): 3000K/ 4000K/ 6000K (simplified on table for code purposes)

STRUCTURE		MEASUREMENTS		
Power (Wattage)	**CCT** (K)	**Length** (mm)	**Height** (mm)	**Cutout** (mm)
10W	Colour Switchable (CS)	114	52	90

Ordering Code Structure

Based on the product configuration guide above, the product code is:

LUX-D - 10W - CS

(Range Name) (Power) (CCT)

ELEVAGE LIGHTING GROUP

5 year warranty


LEADlux
ELEVAGE
LIGHTING GROUP